

R6-6W Series



6W 2:1 Regulated Single & Dual output

Features

- Wide 2:1 Input Range
- Full SMD Technology
- 1500 VDC Isolation, Up to 3500 VDC
- Continuous Short Circuit Protection
- Efficiency up to 83%
- -25 ~ 85°C Operating Temperature
- Plastic Case Standard, Optional Metal Case



The R6 series is a family of cost effective 6W single & dual output DC-DC converters. These converters combine Plastic case in a 24-pin DIL package with high performance features such as 1500 VDC ~ 3500VDC input/output isolation voltage, continuous short circuit protection with automatic restart and tight line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 12, 24 and 48 with output voltage of 5, 9, 12, 15, 24, ± 5 , ± 9 , ± 12 , ± 15 and ± 24 Vdc. High performance features include high efficiency operation up to 83% and output voltage accuracy of $\pm 1\%$ maximum.



All specifications typical at $T_a=25^\circ\text{C}$, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS		PHYSICAL SPECIFICATIONS	
Voltage accuracy	$\pm 1\%$	Case Material	Non-conductive Black Plastic (UL94V-0 rated) Nickel-coated Copper
Line regulation	$\pm 0.5\%$	Base Material	Non-conductive Black Plastic (UL94V-0 rated)
Load regulation	$\pm 0.5\%$	Pin Material	$\varnothing 0.5\text{mm}$ Brass Solder-coated
Ripple & noise (20 MHz bandwidth)(1)	60mV pk-pk	Potting Material	Epoxy (UL94V-0 rated)
Short circuit protection	Continuous	Weight	12.5g (Plastic Case) / 15.0g (Metal Case)
Temperature coefficient	$\pm 0.02\%/^\circ\text{C}$	Dimensions	1.25" x 0.8" x 0.4"
Capacitor load(2)	See table		
INPUT SPECIFICATIONS		ENVIRONMENT SPECIFICATIONS	
Voltage Range	See table	Operating Temperature	$-25^\circ\text{C} \sim 85^\circ\text{C}$ (See Derating Curve) $-25^\circ\text{C} \sim 71^\circ\text{C}$ (For 100% load)
Max. Input Current	See table	Maximum Case Temperature	100°C
No-Load Input Current	See table	Storage Temperature	$-40^\circ\text{C} \sim 125^\circ\text{C}$
Input Filter	PI Type	Cooling	Nature Convection
Input Reflected Ripple Current(3)	35mA pk-pk		
GENERAL SPECIFICATIONS		ABSOLUTE MAXIMUM RATINGS(4)	
Efficiency	See table, typ	These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
I/O Isolation Voltage(3 sec)		Input Voltage(100ms)	
Input/Output	1500~3500Vdc	12 Modes	$-0.7 \sim 24$ Vdc
Metal Case/Input & Output	1000Vdc	24 Modes	$-0.7 \sim 40$ Vdc
I/O Isolation Capacitance	60 pF Typ.	48 Modes	$-0.7 \sim 80$ Vdc
I/O Isolation Resistance	1000M Ohm	Lead Soldering Temperature	260°C
Switching Frequency	100~400kHz	(1.5mm from case 10sec.)	
Humidity	95% rel H		
Reliability Calculated MTBF(MIL-HDBK-217 F)	>2.199 Mhrs		
Safety Standard : (designed to meet)	IEC 60950-1:2001		

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, MOTIEN Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

R6 - 6W 2:1 Regulated Single & Dual output

PARTNUMBER STRUCTURE

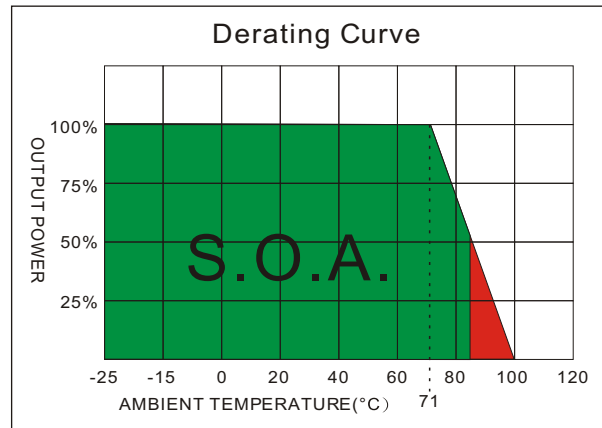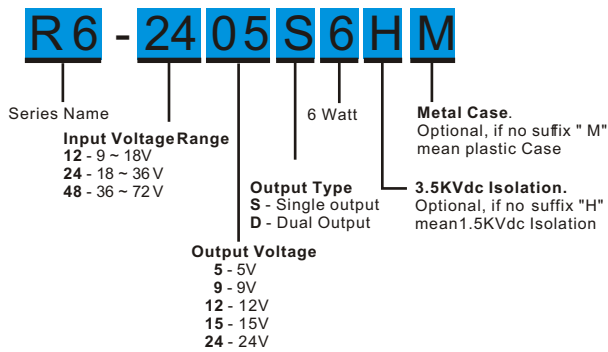

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
R6-1205S6	9-18	20	649	5	300	1200	77	2200
R6-1209S6	9-18	20	649	9	166.5	666	77	470
R6-1212S6	9-18	20	625	12	125	500	80	470
R6-1215S6	9-18	20	625	15	100	400	80	470
R6-1224S6	9-18	20	625	24	62.5	250	80	220
R6-1205D6	9-18	20	649	±5	±150	±600	77	±1000
R6-1209D6	9-18	20	649	±9	±83.3	±333	77	±220
R6-1212D6	9-18	20	625	±12	±62.5	±250	80	±220
R6-1215D6	9-18	20	625	±15	±50	±200	80	±220
R6-1224D6	9-18	20	625	±24	±31.3	±125	80	±100
R6-2405S6	18-36	12	312	5	300	1200	80	2200
R6-2409S6	18-36	12	301	9	166.5	666	83	470
R6-2412S6	18-36	12	301	12	125	500	83	470
R6-2415S6	18-36	12	301	15	100	400	83	470
R6-2424S6	18-36	12	301	24	62.5	250	83	220
R6-2405D6	18-36	12	312	±5	±150	±600	80	±1000
R6-2409D6	18-36	12	301	±9	±83.3	±333	83	±220
R6-2412D6	18-36	12	301	±12	±62.5	±250	83	±220
R6-2415D6	18-36	12	301	±15	±50	±200	83	±220
R6-2424D6	18-36	12	301	±24	±31.3	±125	83	±100
R6-4805S6	36-72	8	156	5	300	1200	80	2200
R6-4809S6	36-72	8	150	9	166.5	666	83	470
R6-4812S6	36-72	8	150	12	125	500	83	470
R6-4815S6	36-72	8	150	15	100	400	83	470
R6-4824S6	36-72	8	150	24	62.5	250	83	220
R6-4805D6	36-72	8	156	±5	±150	±600	80	±1000
R6-4809D6	36-72	8	150	±9	±83.3	±333	83	±220
R6-4812D6	36-72	8	150	±12	±62.5	±250	83	±220
R6-4815D6	36-72	8	152	±15	±50	±200	82	±220
R6-4824D6	36-72	8	152	±24	±31.3	±125	82	±100

Suffix "H" means 3.5KVdc isolation


Suffix "M" means Metal Case instead of standard Plastic case

R6 - 6W 2:1 Regulated Single & Dual output

NOTE

1. Typical value at nominal input voltage and full load.
2. Test by nominal input voltage and constant resistor load.
3. Measured Input reflected ripple current with a simulated source inductance of 12uH.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
5. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.
6. It's necessary to add minimum capacitor in output for some models, please check single model datasheet for detail value.

MECHANICAL SPECIFICATIONS FOR HIGH ISOLATION MODEL

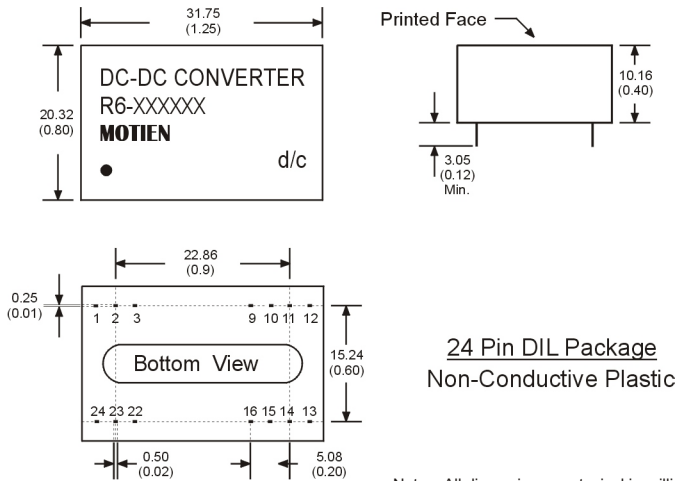


24 Pin DIL Package
Non-Conductive Plastic

- Notes: All dimensions are typical in millimeters (inches).
1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS				
PIN NUMBER	SINGLE	DUAL	SINGLE-H	DUAL-H
1	+V Input	+V Input	N.P.	N.P.
2	N.C.	-V Output	-V Input	-V Input
3	N.C.	Common	-V Input	-V Input
9	N.P.	N.P.	N.C.	Common
10	-V Output	Common	N.P.	N.P.
11	+V Output	+V Output	N.C.	-V Output
12	-V Input	-V Input	N.P.	N.P.
13	-V Input	-V Input	N.P.	N.P.
14	+V Output	+V Output	+V Output	+V Output
15	-V Output	Common	N.P.	N.P.
16	N.P.	N.P.	-V Output	Common
22	N.C.	Common	+V Input	+V Input
23	N.C.	-V Output	+V Input	+V Input
24	+V Input	+V Input	N.P.	N.P.

MECHANICAL SPECIFICATIONS

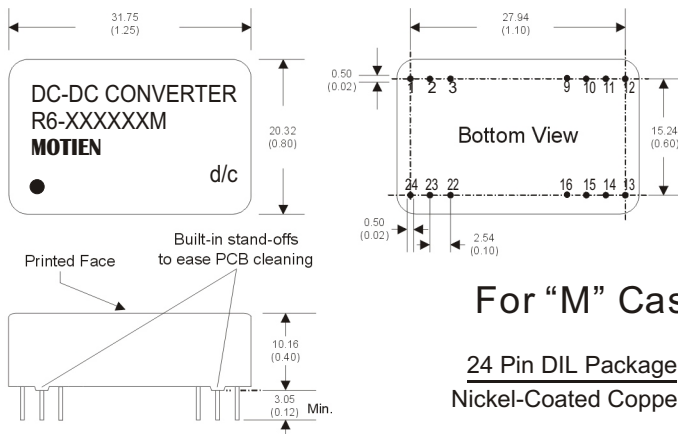

For "M" Case
24 Pin DIL Package
Nickel-Coated Copper

- Notes: All dimensions are typical in millimeters (inches).
1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS				
PIN NUMBER	SINGLE	DUAL	SINGLE-H	DUAL-H
1	+V Input	+V Input	N.P.	N.P.
2	N.C.	-V Output	-V Input	-V Input
3	N.C.	Common	-V Input	-V Input
9	N.P.	N.P.	N.C.	Common
10	-V Output	Common	N.P.	N.P.
11	+V Output	+V Output	N.C.	-V Output
12	-V Input	-V Input	N.P.	N.P.
13	-V Input	-V Input	N.P.	N.P.
14	+V Output	+V Output	+V Output	+V Output
15	-V Output	Common	N.P.	N.P.
16	N.P.	N.P.	-V Output	Common
22	N.C.	Common	+V Input	+V Input
23	N.C.	-V Output	+V Input	+V Input
24	+V Input	+V Input	N.P.	N.P.